

HUBTRACTYRES

JOURNEY TO THE FUTURE

Premium Selections of Truck Tyres

Experience peak performance with our premium truck tyre collection. Crafted for durability and precision, our high-end tyres redefine excellence on the road.



✉ info@hubtractyre.com

🌐 WWW.HUBTRACTYRE.COM

☎ 0086-137-8285-3796 / 0044-759-217-2791 / 0086-182-3912-2663




HUBTRACTYRES
JOURNEY TO THE FUTURE

WORLD CLASS BRAND
MADE IN EUROPE

WWW.HUBTRACTYRE.COM

**NEW PRODUCT
MANUALS**

HIGHWAY D23

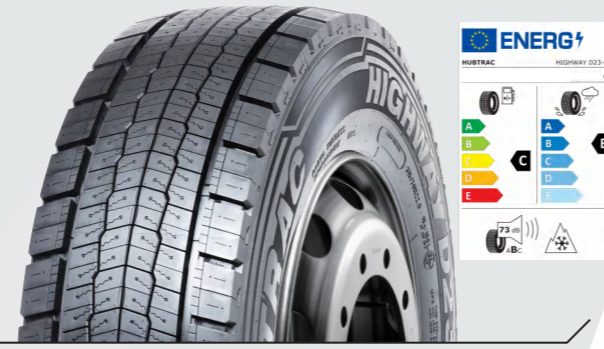

- Center ribs stiffeners with hidden grooves for wear and cornering performance.
- Edge blades to prevent groove edge river wear.
- Blades variable depth for optimum rib flexion, uniform wear and wet braking performance.

Product data

No.	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure		Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm		
						Dual	Single						
1	315/70R22.5	16	154/150 (152/148)	L(M)	9.00	3350	900	3750	900	1014	312	16.5	ETRTO

MIXED D21



- Tread Compound helps resist cuts and chips for enhanced retreadability.
- Groove stone ejectors help prevent stone trapping and drilling to enhance casing toughness and retreadability.

Product data

No.	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure		Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm		
						Dual	Single						
1	13R22.5	18	156/150	K	9.75	3350	875	4000	875	1124	320	21.0	ETRTO
2	315/80R22.5	20	156/150	K	9.00	3350	850	4000	850	1076	312	21.0	ETRTO

REGIONAL T22



- New sipes Improve grip and resistance to tread tearing in severe conditions of use.
- New groove shapes provides greater traction on slippery road surfaces.

Product data

No.	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure		Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm		
						Dual	Single						
1	385/65R22.5	24	164(158)	K(L)	11.75	/	/	5000	900	1072	389	15.5	ETRTO

Remark : The above technical data are for reference only .

REGIONAL S23



- Blades variable depth for optimum rib flexion, uniform wear and wet braking performance.
- Slightly directional design to provide grip in forward & braking direction.
- Groove stone ejectors help prevent stone trapping and drilling to enhance casing toughness and retreadability.

Product data

No.	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure		Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm		
						Dual	Single						
1	295/60R22.5	16	150/147	L	9.00	3075	900	3350	900	926	292	14.0	ETRTO
2	315/70R22.5	18	156/150 (154/150)	L(M)	9.00	3350	900	4000	900	1014	312	15.5	ETRTO
3	315/80R22.5	20	158/150 (154/150)	L(M)	9.00	3350	850	4000	850	1076	312	15.5	ETRTO
4	315/80R22.5	22	158/150 (154/150)	L(M)	9.00	3350	900	4250	900	1076	312	15.5	ETRTO

REGIONAL D22



- New sipes Improve grip and resistance to tread tearing in severe conditions of use.
- New groove shapes provides greater traction on slippery road surfaces.

Product data

No.	Size	Ply Rating	Load Index	Speed Symbols	Standard Rim	Max Load and Inflated Pressure		Overall Diameter (mm)	Section Width (mm)	Tread Depth (mm)	Operation Norm		
						Dual	Single						
1	295/60R22.5	16	150/147 (149/146)	K(L)	9.00	3075	900	3350	900	926	292	18.0	ETRTO
2	315/70R22.5	16	154/150 (152/148)	L(M)	9.00	3350	900	3750	900	1014	312	20.0	ETRTO
3	315/80R22.5	20	156/150 (154/150)	L(M)	9.00	3350	850	4000	850	1076	312	22.0	ETRTO

Remark : The above technical data are for reference only .